


Characteristics

Rated operating distance 1.3 ... 2.5 mm for modules 1 ... 4
 Dynamic version, 5 Hz to 20 kHz
 DC three-pole, push-pull output (plus- and minus-switching)
 Rotation speed detection with high operating frequency (up to 20 kHz) and high geometrical resolution (module ≥ 1)
 Hall element switches are unsuitable for detecting slots, for axial approach, and for non-magnetic materials
 Customer-specific design

Dimensions

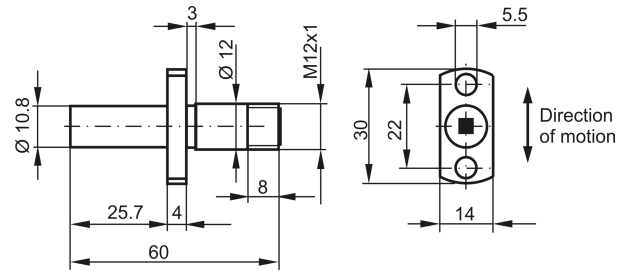

Technical data

(Unless otherwise specified $U_B = 24\text{ V}$, $T_U \approx 23\text{ }^\circ\text{C}$, and $I_L = 0$)

Rated operating distances s_n (10 kHz)	1.3 mm for module 1 1.8 mm for module 2 2.4 mm for module 3 2.5 mm for module 4
Effective operating distance s_r	$s_n (1 \pm 10\%)$
Operating voltage U_B	11 ... 24 ... 30 VDC
Permissible ripple voltage	10 %
Current consumption without load	$\leq 14\text{ mA}$
Maximum current load capacity of the output	$\leq 25\text{ mA}$
Residual current (locked output)	plus-switching $\leq 0.5\text{ mA}$ minus-switching $\leq 2.5\text{ mA}$
Voltage drop (conductive output; $I_L = 25\text{ mA}$)	plus-switching $\leq 8\text{ V}$ minus-switching $\leq 6\text{ V}$
Output	1 push-pull, temporary short-circuit protection $\leq 15\text{ s}$
Operating frequency f	5 Hz ... 20 kHz
Ambient temperature range T_U	- 25 ... + 80 °C
Reverse polarity protection	yes
Connection	M12 connector, 4-pole
Maximum lead length	$\leq 150\text{ m}$
Weight	30 g
Design	cylinder with flange
Housing material / sensing face	brass / plastic (PBT)
Protection rating according to EN 60529	IP 65


When $U_B = 24\text{ V}_{DC}$ and $R_L = 1\text{ k}\Omega$, $V_{A\text{ High}}$ is at least 18 V.

Notes



For mounting, a precise vertical alignment of the housing to the tooth flanks is necessary. The switching point is not in the geometric axis of the hall element switch. Keep away metal cuttings from the sensing face. Avoid operation near strong magnetic fields. The distance between the connecting lead and the control leads of the inductive loads should be $\geq 30\text{ cm}$. Use a shielded lead for lead length $> 10\text{ m}$. When the sensor is switched on but not activated, the output signal may either show a low or high state.

Mounting instructions

Gear wheel St37 / C45

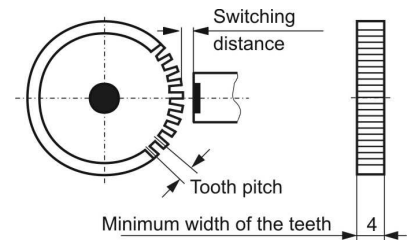

Switching distance as a function of module and operating frequency

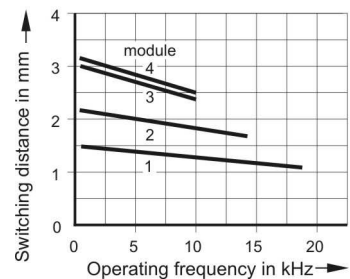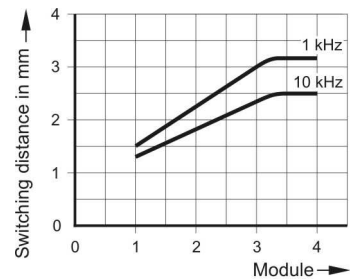

Certification

Complies with standard EN 60947-5-2



Safety Regulations


Connection, commissioning and maintenance may only be accomplished by qualified or instructed staff.

We are certified according to DIN EN ISO 9001

Subject to technical changes!

Wiring

DC voltage, three-pole,
push-pull output, plug

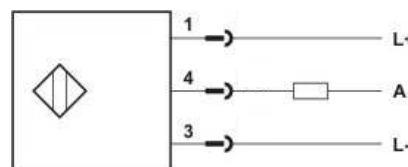

Plug

